

AVVOLGIBILE



Peso medio
Medium Weight



9010 BT



8017 FT



*

Guide laterali . Side rails





Classe 2



Tenda provvista di un sistema di traino (cavo) che collega in modo permanente il rullo avvolgitore al terminale, mantenendo sempre in trazione il telo in qualsiasi posizione. Copertura indicata per lucernari, verande e per l'applicazione sopra e sotto i pergolati in legno. Installazione sia in posizione verticale che orizzontale, nonché in qualsiasi inclinazione intermedia. La struttura è provvista di motore SOMFY meccanico di serie, cassonetto e di terminale ispezionabili per facilitare il montaggio.

Awning with special drawing system (cable) which joins permanently the roll to the front bar, always keeping the fabric tensioned in each position. This structure is endowed with electric motor and aluminium shutter-box. Ideal awning for skylights, verandas and for the application above/below wood pergolas. Its installation can be both horizontal and vertical, and in intermediate position. The structure is equipped with a standard mechanical SOMFY motor, accessible shutter-box and front bar for easy installation.

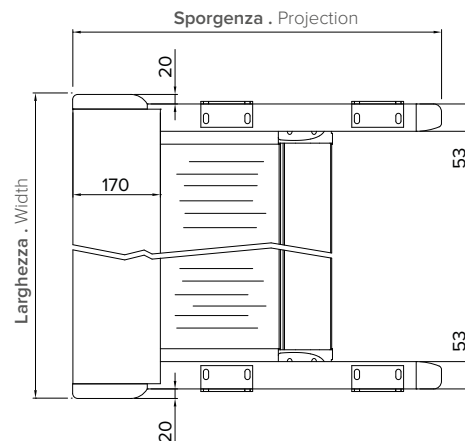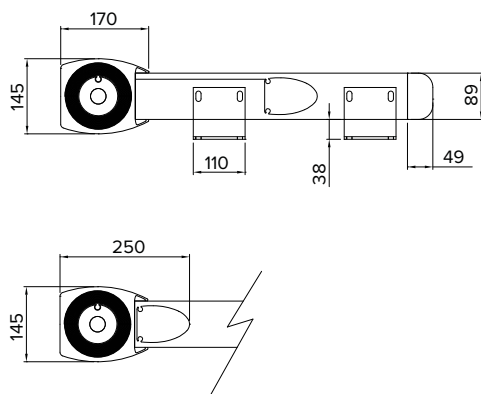

Optional



+ 20%



+ 5%

Solo.Only PVC 302
(max L3xS3)



+ 12%

Resinati
(max L3xS3)



+ 7%

(max L3xS3)



+ 20%

(max L2xS2)