

ZT115 ZIP PLUS



Peso medio
Medium Weight



9010 BT



V02



V05




No Cristal



C


Chiusure . Closings

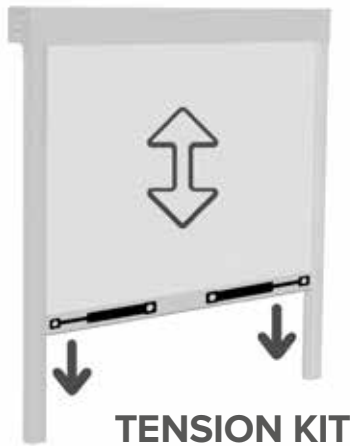

Tenda a caduta verticale con cassonetto, dotata di guide antivento. Sistema di scorrimento del telo vincolato nelle guide tramite cerniera a zip, dal sistema brevettato, ottenendo una chiusura pressoché ermetica. Profilo terminale maggiorato, contenente sistema TENSION KIT. TENSION KIT sfrutta la forza dei pistoni a gas per mettere in trazione il telo, in qualsiasi posizione intermedia o estesa. Cassonetto ispezionabile, predisposto per attacco a parete o soffitto. Durante l'avvolgimento del telo potrebbero crearsi alterazioni quali, restringimenti, ondulazioni e grinze da considerarsi caratteristiche fisiche del telo stesso. Larghezza minima realizzabile 176 cm.


Vertical blind with cassette, provided with side windproof rails. Sliding cloth zipped in the side rails, with patented system, getting a quite hermetic closing. Oversized front bar profile, containing a TENSION KIT system. Our TENSION KIT uses the force of the gas pistons to put in traction the cloth, in any intermediate or extended position. Inspectable cassette, arranged for wall, ceiling mounting. The wrapping of the cloth could create some alterations as shrinking, undulations and creases, which should be considered as physical features of the fabric itself. Minimum realizable width 176 cm.

Vista interna . Inner point of view

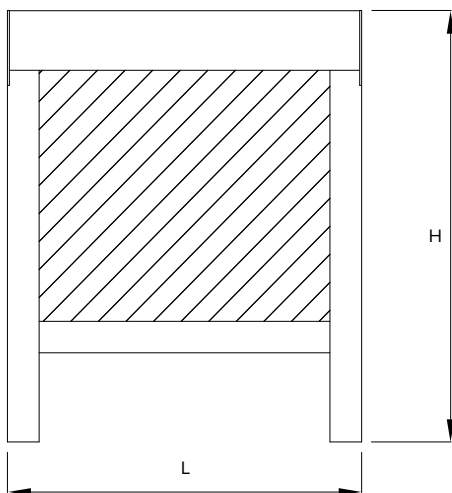

Per attacco a soffitto o parete frontale, fissaggio da interno cassonetto.
For ceiling or wall mounting, installation from the inner part of the cassette.

Lato ispezionabile
Inspectable side




Sede per triangolo in PVC e policarbonato.
Seat for PVC or polycarbonate triangle.

Sede TENSION KIT
Non applicare esternamente
ulteriori profili/accessori
tramite viti
Do not apply externally
any profiles / accessories
using screws



Profilo terminale
Front bar profile

Guarnizione H 2cm
Gasket



Profilo guida
Rail profile

OPTIONAL

053-919

053-626

Larghezza minima realizzabile 176 cm . Minimum realizable width 176 cm.

Uscita cavo motore non predisposta se non diversamente specificato . Motor cable output not prepared unless otherwise specified.

Optional



+ 20%



+ 5%



+ 10%



+ 7%



+ 20%

** L > 4 mt. solo "E"