

# T730

## Guide laterali . Side rails





Struttura a guide laterali con scorrimento all'interno delle guide.  
Funzionamento ad argano o a motore. Applicabile sia a parete che a soffitto. Verniciatura con polvere poliestere eseguita presso il nostro stesso stabilimento seguendo rigidi standard qualitativi. La struttura è caratterizzata da una notevole semplicità e buona robustezza. Struttura indicata per la copertura di superfici come terrazzi, locali pubblici e ovunque sia necessario ottenere anche una copertura frontale. Sporgenza massima mt. 4.00. Larghezza massima mt. 4.60 Altezza massima mt. 2.50. Inclinazione della tenda tra i 10° e 30° corrisponde ad una pendenza tra il 18% e il 57% della sporgenza (P).

Side rails awning with sliding inside rails. Working by gear or motor. Application both on wall or on ceiling. The structure is painted by polyester powder, performed with rigid qualitative standards in our factory. It is characterized by great simplicity and good sturdiness, ideal for covering terraces, public rooms and everywhere is necessary a frontal covering. Maximum advised projection mt. 4.00. Maximum advised width mt. 4.60. Max frontal height mt. 2.50. Inclination of the awning from 10° to 30° corresponds to a slope between 18% and 57% of its depth (P).



### Standard



### Optional



W96




Mod. 2

# Dati tecnici . Technical data



Classe 2

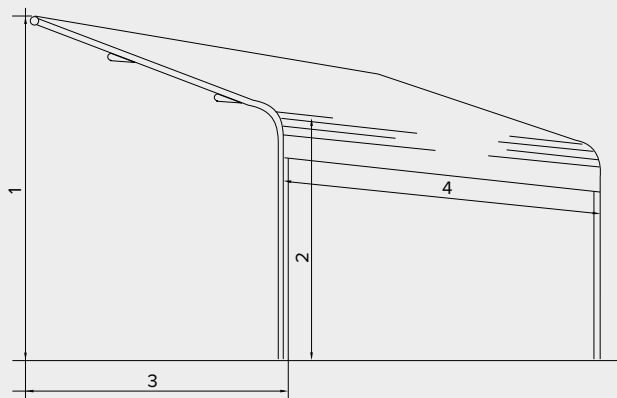

INDICARE SEMPRE . ALWAYS INDICATE:


1 Altezza attacco parete . Wall installation height

2 Altezza arrivo . Finish height

3 Profondità . Projection

4 Larghezza tenda . Width

Attacco parete o soffitto . Wall or ceiling application

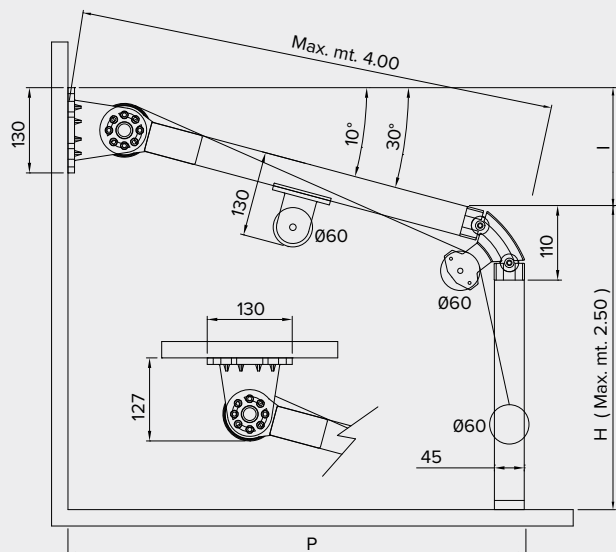

Sezione profilo  
Profile section  
[mm.]

